


The following is to be used when interfacing a 4M2 or a 6M2 residential controller to a gate operator requiring a dry contact OPEN and CLOSE signal.

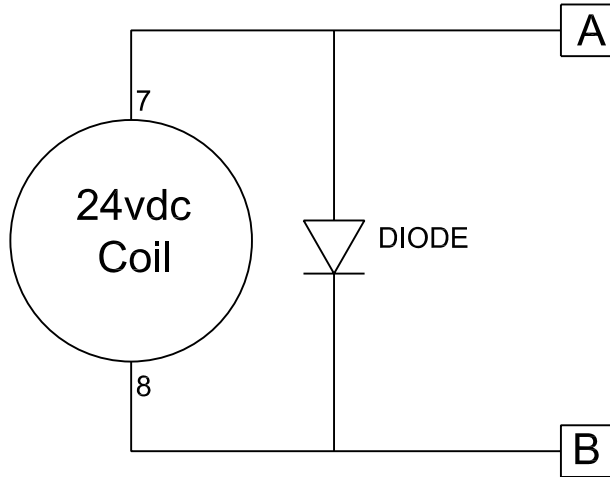


	4M2 DES / LOC	6M2 DES / LOC
A	OPF / J3.2	V- / J3.5
B	+24V / J3.4	TC9 / J14.1

RELAY: General Purpose Relay; Grainger, PN: 5YR20 or Equivilant

RELAY SOCKET: Grainger, PN:10E075 or Equivilant

DIODE: 1N4005 or Equivilant

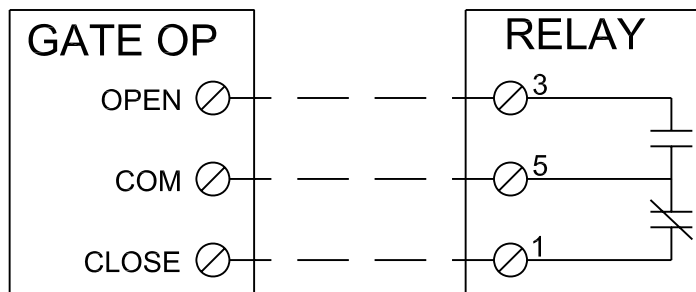

DOOR INTERFACE RELAY

Electro-Mech Industries
(847)593-4900

SIZE	DATE: 10-31-16	DWG NO.	REV
SCALE		SHEET	